


# HINGE DRAWN BARREL UP

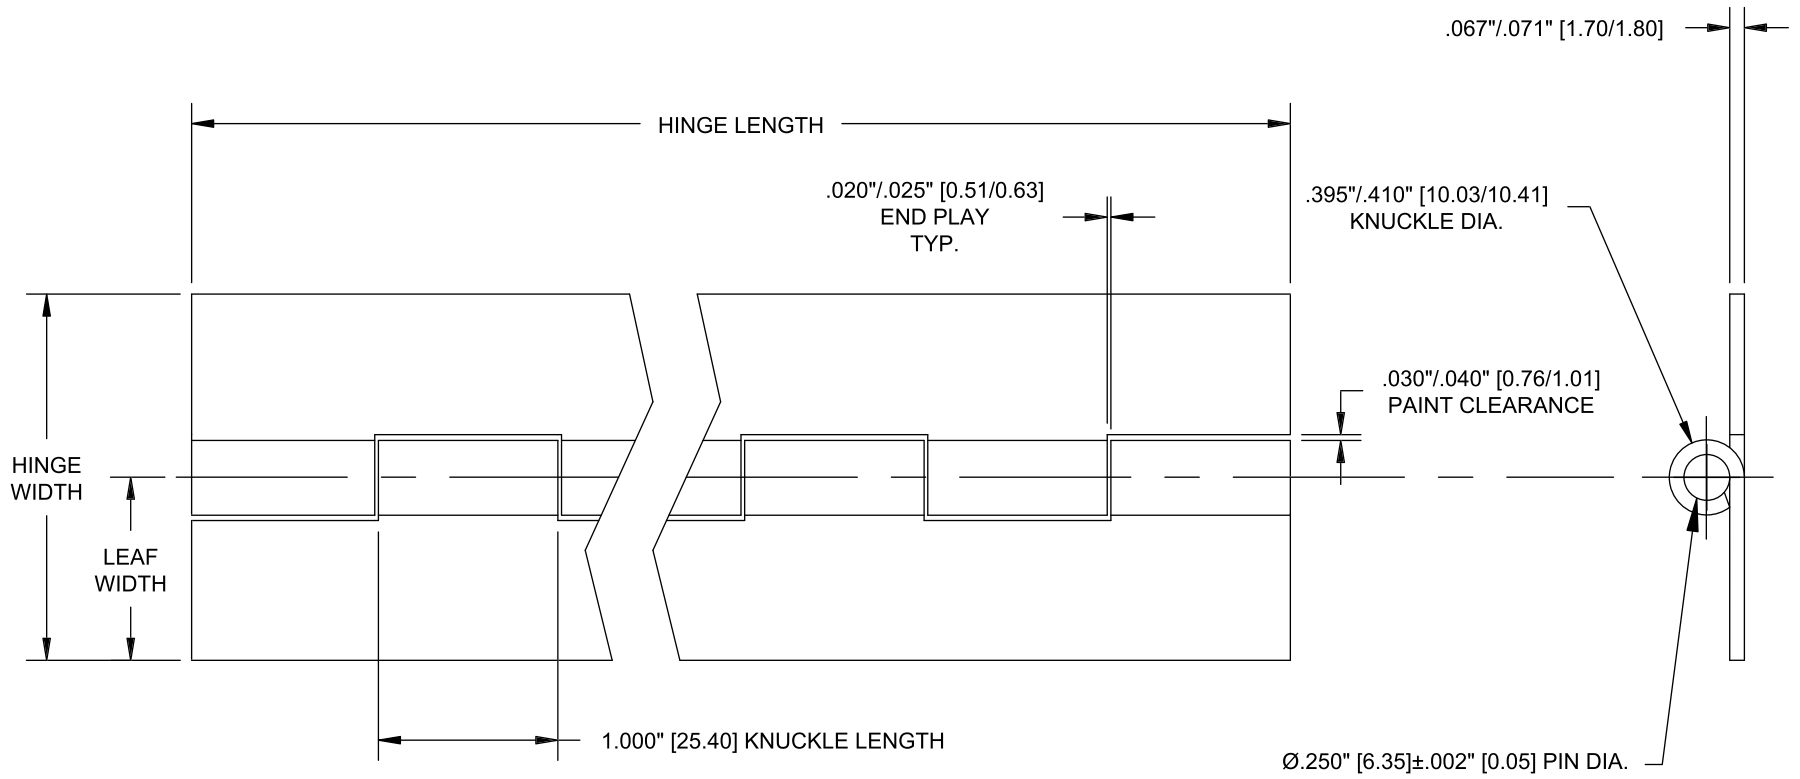


**NOTES:**

- 1] S&S Hinge series # 1300
- 2] Gauge/thickness - .067"/.071" [1.70 mm/1.80 mm].
- 3] Knuckle length - 1.00"/25.40 mm.
- 4] Pin diameter - 1/4"/.250"/6.35 mm.
- 5] Hinge rotates 270°.
- 6] See chart to the right for standard open widths.
- 7] Standard metals: steel, stainless. Aluminum available by special order.

SERIES #:	HINGE WIDTH:	
1303	1.50"	[38.10]
1305	2.00"	[50.80]
1307	2.50"	[63.50]
1309	3.00"	[76.20]
1311	3.50"	[88.90]
1313	4.00"	[101.60]

DIMENSIONS IN:			
INCHES <input checked="" type="checkbox"/> MILLIMETERS <input checked="" type="checkbox"/>			
S&S HINGE CO.			
STANDARD TOLERANCES			
DEC	INCH	MM	THIRD ANGLE
.XX	± .030	± 0.750	
.XXX	± .015	± 0.380	
HOLE DIA	± .005	± 0.127	
ANGLE	± 3°		

THIS PRINT AND/OR SPECIFICATION ARE EXCLUSIVE PROPERTY OF S&S HINGE CO. AND ARE NOT TO BE REPRODUCED, COPIED, USED OR DISCLOSED TO ANYONE WITHOUT PERMISSION.



CUSTOMER:

REV	DATE	DESCRIPTION

**S&S HINGE**  
C O M P A N Y  
Continuous Hinge, Quality and Service Worldwide | Est. 1932

210 COVINGTON DRIVE  
BLOOMINGDALE, IL. 60108  
TEL: (630) 582-9500 \* 1-800-332-1227  
FAX: (630) 582-8844

DRAWN BY: JOHNNY NGUYEN

DATE:	SCALE: N-T-S
-------	--------------

PART No: 1300 series